




LD-236B

Theatrical

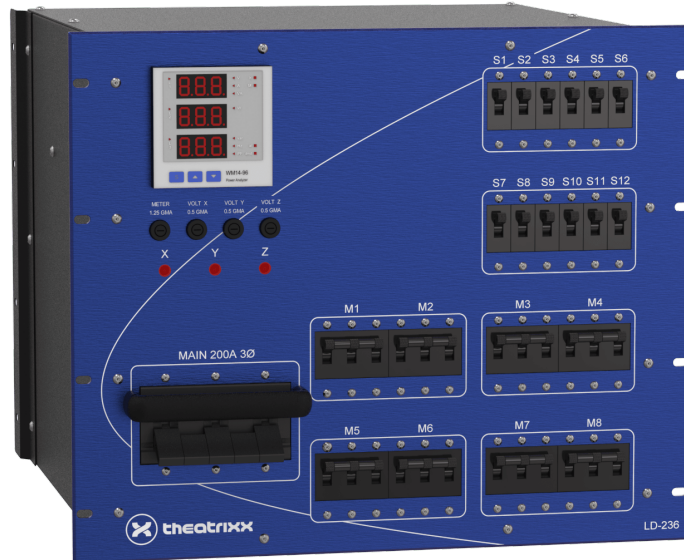

#LD236B

Built to withstand the daily hazards of touring, this LD-236B Theatrical Electrical Distribution features an impressive amount of options in such a small format of only 9 rack units. The front panel is cut from a thick 3/16" aluminum sheet and is fixed to a robust steel chassis with rear support. It also features a handle protection over the Main Breaker switch. All circuit breakers can be installed recessed with the addition of acrylic spacers for protection (optional). This type of power distribution is designed for lighting and stage power applications. It offers 8 separate TL5 30A 120/208V 3 phases (L21-30) connectors and 6 split 20A Edison Duplex (5-20) over a 200A 3 phases Main Breaker. Panel mount terminals and neon indicators allow quick and easy voltage checks.

Input

Connector

CAM In/Thru – Straight or Ground/Neutral Reversed

Breaker

200A 120/208V 3 phases Main Breaker

Outputs

Connectors

8x L21-30 Receptacles
6x 5-20 Duplex



	Breakers	8x 30A 120/208V Circuits 12x 20A 120V Circuits
Features	Digital Metering	Yes, integrated multifunction voltmeter/ammeter/wattmeter
	Single/Three Phase Switch	No
	Phase Presence Indicators	1x neon light per input phase
	Voltage Metering Jacks	1x fused tip jack per input phase + 1x unfused tip jack on Neutral
	Enclosure construction	Robust steel housing
Dimensions	Height	400.05 mm (15.75?) – 9RU
	Depth	516.00 mm (20.32?)
	Width	482.60 mm (19.00?)



Certifications



DESIGNED & MANUFACTURED
IN CANADA 