


Features

Total FX Package	Pan- 540°
Modular Construction	Tilt- 265°
Fast Service Design	Max Speed Pan (360°)- 3.66s
Electronic Cooling System Control	Max Speed Tilt (252°)- 2.59s
LED Type- 600W Bright White Engine	Full Color LCD Display W/ Battery Mode
LED Hours- 70% Luminous output, 50,000 hrs.	5-Pin DMX/RDM Connector
Active Thermal Control	3-Pin DMX/RDM Connector
Fan Modes- Standard / Continuous / Studio	Powercon Connector
RDM Compatible	Pan and Tilt Locks
Control Options- DMX 512/RDM	Integrated Yoke Arm Handles
DMX Channels - 43	Indigo Highlighter LED's
	Road Case Included (Single)

Optical

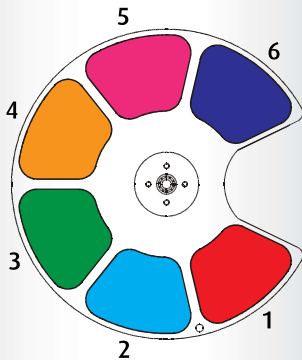

Fixed Color Wheel

6 + Open

- 1- Red
- 2- Blue
- 3- Green
- 4- Orange
- 5- Purple
- 6- Dark Blue

Linear CMY / CTO

Lens Defog System

Iris

Zoom - 7 to 47 degrees


Auto-Focus Function

Animation 1- Rotating Wheel

Animation 2- Art FX Glass Wheel

Light Frost


4 Facet Linear Prism and 3 Facet Triangular Prism

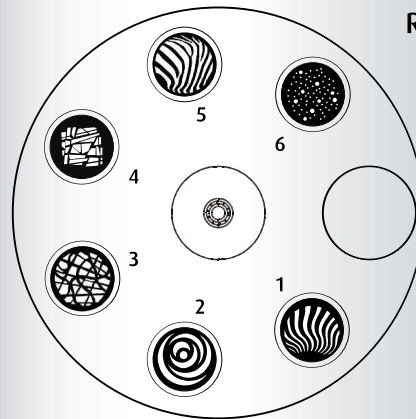

Rotating Gobo Wheel 1

6 + Open

- 1- Seashell
- 2- Crescents
- 3- Abstract
- 4- Fracture
- 5- Zebra
- 6- Shower

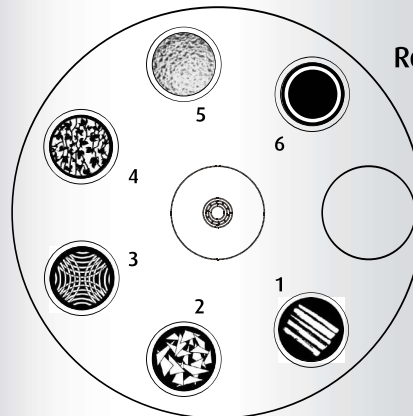

Rotating Gobo Wheel 2

6 + Open

- 1- Strikes
- 2- Triangles
- 3- Woven
- 4- Dense Foliage
- 5- Ice
- 6- Tunnel

Gobo Dimensions \varnothing { 0.D.- 30mm (1.18 in)
Image Area- 25mm (.98 in)

Photometrics

Ultra-Brite

High CRI 6500K

Lumens*-	25,000	20,000
CRI-	>75	>90
Color Temperature-	6500K	6500K
Part Number	H7010017	H7010022

* Lumens as measured by Everfine 2.0 integrating sphere and PMS-80 spectrophotometer. Calibration date March 3, 2014

SolaSpot 2000

Technical Data Sheet

Revised: July 5, 2017

Electrical


Input Power Rating- AC 100V - 240V 50/60 Hz

10-4 Amps

Auto Switching Power Supply

Db(a)- 38

Dimensions / Physical

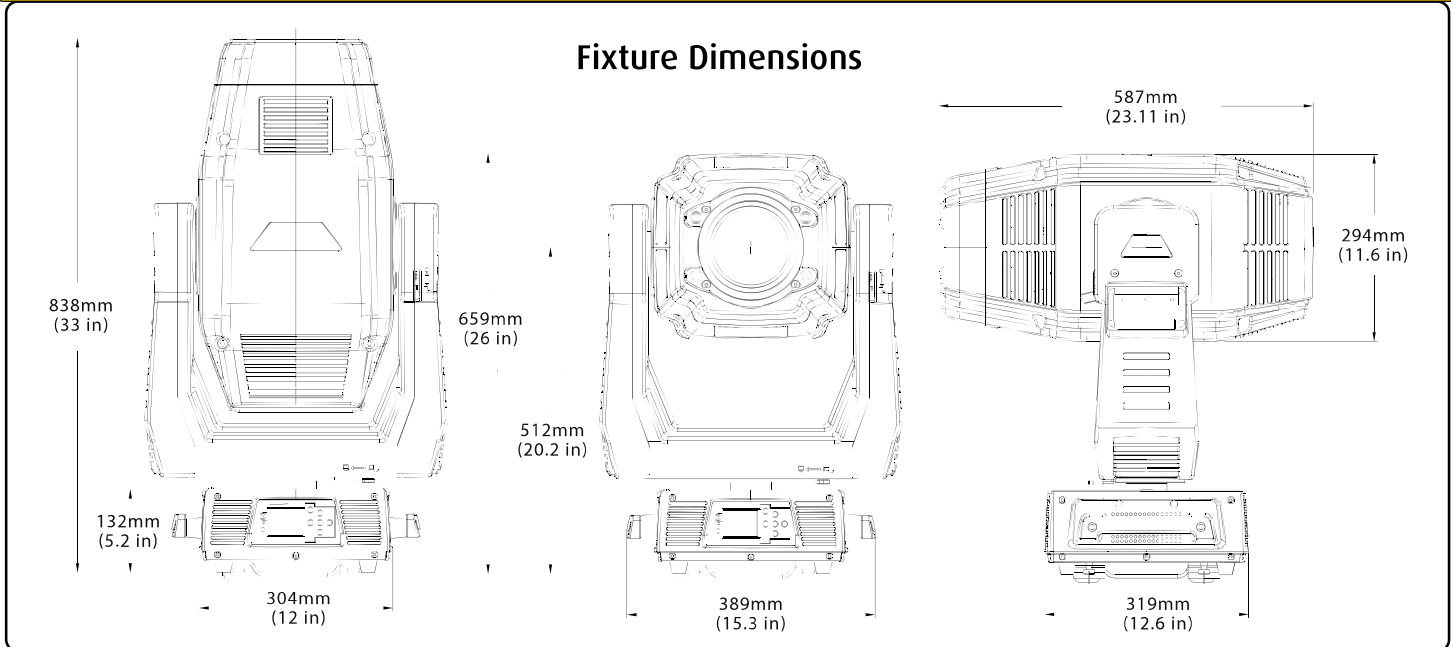


Fixture Weight	42 Kg (92 Lbs.)
Packing Gross / Shipping Weight	85 Kg (187 Lbs.)
Shipping Dimensions (L x W x H)	749 x 521 x 953 mm 29.5 x 20.5 x 37.5 in.
Min Distance to Flammable Objects	0.5m (1.64 ft.)
Min Distance to Lighted Objects	1.5m (4.9 ft.)
Operating Temperature	0 - 45° C (32 - 113° F)
Storage Temperature	-20 - 60° C (0 - 140° F)
Compliance Approvals	CE, ETL

Mounting Options-

The fixture can be truss mounted using included mounting brackets. It can also stand upright on a stable surface.

Available Fixture Colors -	Black White - By Request
----------------------------	-----------------------------



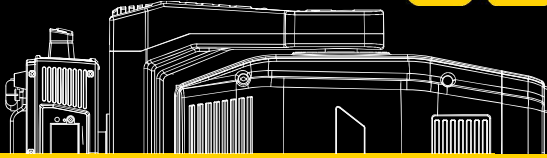

Zoom Range and Distance Chart

