
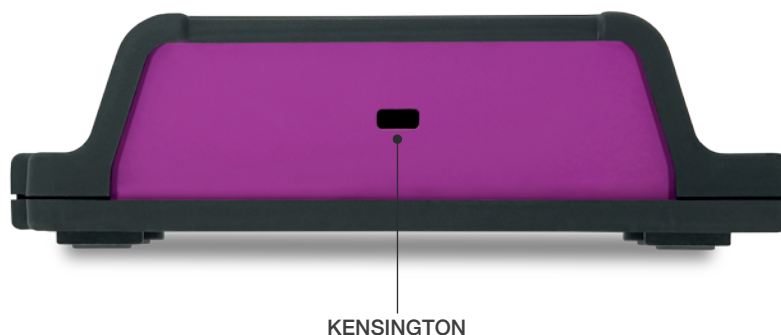


LPU-1

The LPU-1 is a solid-state lighting controller. It features 512 DMX channels and supports up to 64 fixtures.

The LPU-1 is bundled with the Cuety and Cuety Remote software which is available for iOS, Android, Windows, MacOS and Ubuntu Linux.

The Cuety software is available from the app stores or the Visual Productions website.

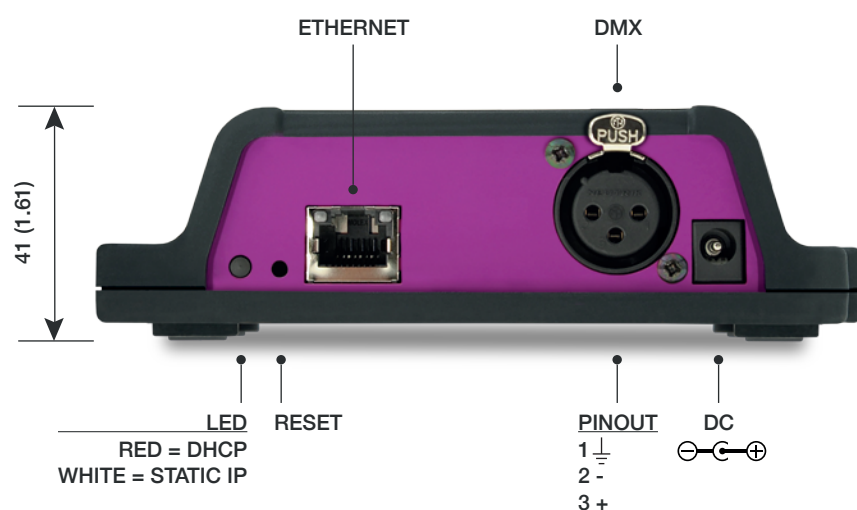

SPECIFICATIONS



- Ethernet port
- DMX512-A (ANSI E1.11) port (Opto-isolated)
- Art-Net
- sACN
- 9-12V DC 500mA (PSU included)
- Desktop or DIN Rail mounted (optional adapter)
- Kensington lock
- Operating temperature -20°C to +50°C (-4°F to 122°F)
- Compliance EN55103-1 EN55103-2
- Bundled with Cuety, Cuety Remote and vManager software

LPU-2

The LPU-2 is a solid-state lighting controller. It features 512 DMX channels and supports up to 64 fixtures. This stand-alone controller can be triggered by IP based protocols such as TCP, UDP, OSC & HTTP.

The LPU-2 is bundled with the Cuety and Cuety Remote software which is available for iOS, Android, Windows, MacOs and Ubuntu Linux.

The Cuety software is available from the app stores or the Visual Productions website.

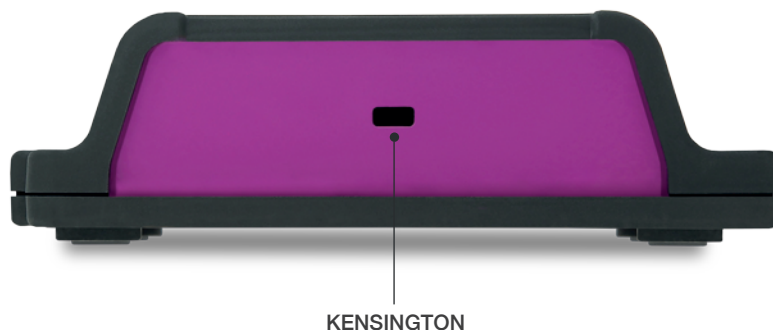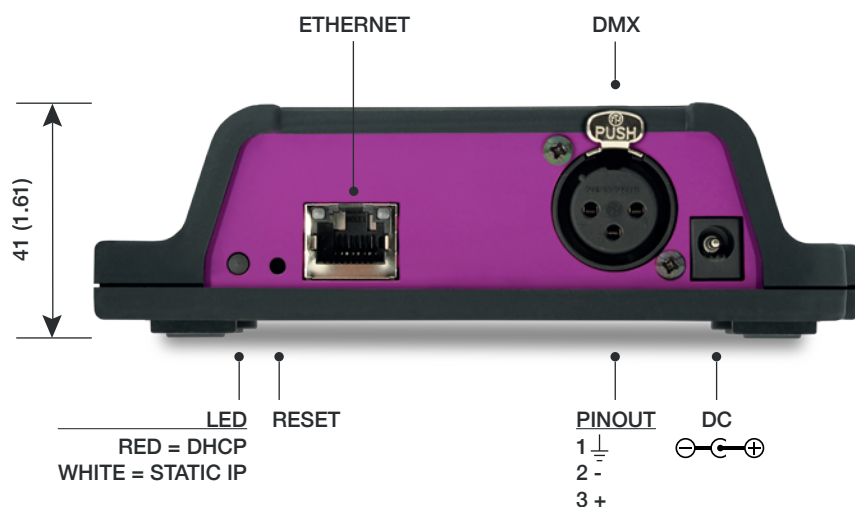

SPECIFICATIONS

- Ethernet port
- DMX512-A (ANSI E1.11) port (Opto-isolated)
- Art-Net
- sACN
- TCP
- UDP
- OSC
- HTTP
- 9-12V DC 500mA (PSU included)
- Desktop or DIN Rail mounted (optional adapter)
- Kensington lock
- Operating temperature -20°C to +50°C (-4°F to 122°F)
- Compliance EN55103-1 EN55103-2
- Bundled with Cuety, Cuety Remote and vManager software