




SD-128B

Theatrical

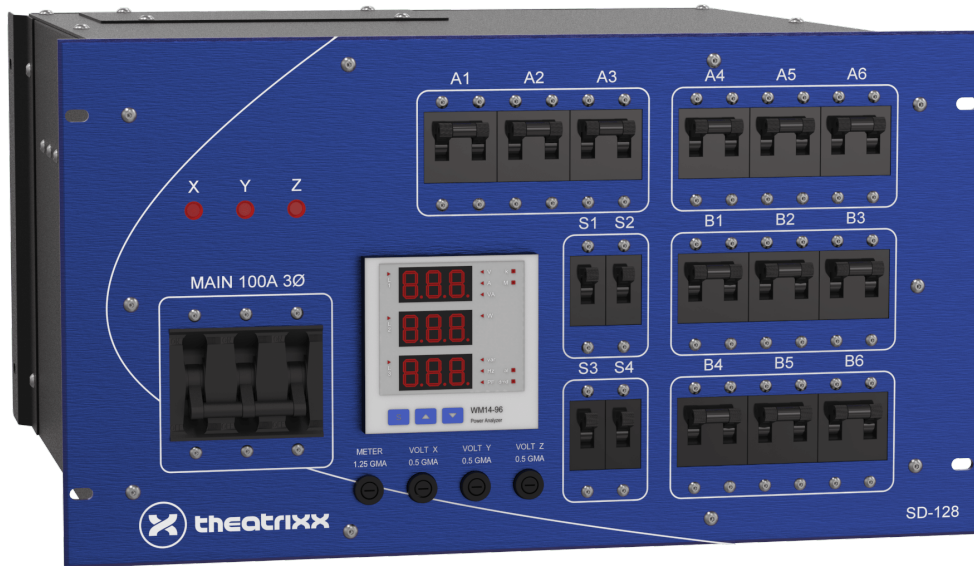

#SD128B

Built to withstand the daily hazards of touring, this SD-128B Theatrical Electrical Distribution features an impressive amount of options in such a small format of only 6 rack units. The front panel is cut from a thick 3/16" aluminum sheet and is fixed to a robust steel chassis with rear support. All circuit breakers can be installed recessed with the addition of acrylic spacers for protection (optional). This type of power distribution is designed for lighting and stage power applications. It offers 12 separate 20A 208V** circuits on doubled Socapex (120 and 208V) and 2 split 20A Edison Duplex (5-20) over a 100A 3 phases Main Breaker. Panel mount terminals and neon indicators allow quick and easy voltage checks. It also features a 1 to 3 phases selection located on top under an easy access trap door.

Input

Connector

CAM In/Thru – Straight or Ground/Neutral Reversed

Breaker

100A 120/208V 3 phases Main Breaker

Outputs

Connectors

2x Socapex 19 pins (120V)
2x Socapex 19 pins (208V)**
4x 5-20 Duplex



| | | |
|-------------------|--------------------------------------|---|
| Features | Breakers | 12 X 20A 208V Circuits** 8x 20A 120V Circuits |
| | Digital Metering | Yes, integrated multifunction voltmeter/ammeter/wattmeter |
| | Single/Three Phase Switch | Yes, easy access from top of enclosure |
| | Phase Presence Indicators | 1x neon light per input phase |
| | Voltage Metering Jacks | 1x fused tip jack per input phase + 1x unfused tip jack on Neutral |
| | Enclosure construction | Robust steel housing |
| Dimensions | Height | 266.70 mm (10.50?) – 6RU |
| | Depth | 516.00 mm (20.32?) |
| | Width | 482.60 mm (19.00?) |



***Customer must specify 208V pinout configuration
when ordered*

Certifications



DESIGNED & MANUFACTURED
IN CANADA 