




# LD-236A

Theatrical

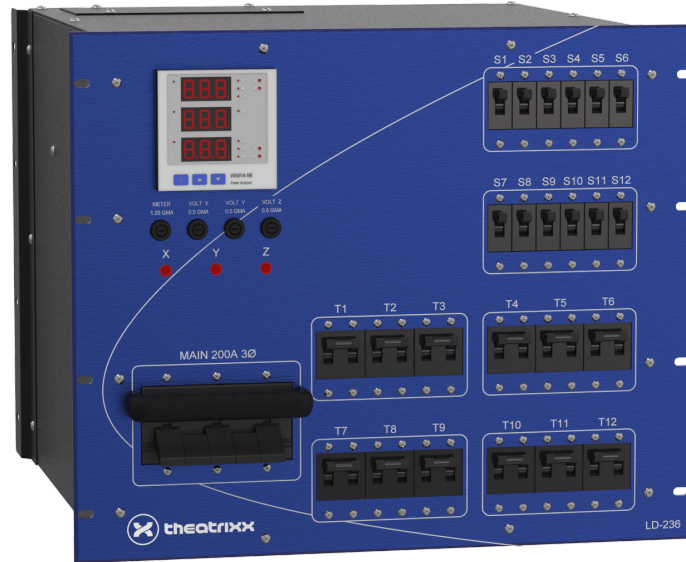

## #LD236A

Built to withstand the daily hazards of touring, this LD-236A Theatrical Electrical Distribution features an impressive amount of options in such a small format of only 9 rack units. The front panel is cut from a thick 3/16" aluminum sheet and is fixed to a robust steel chassis with rear support. It also features a handle protection over the Main Breaker switch. All circuit breakers can be installed recessed with the addition of acrylic spacers for protection (optional). This type of power distribution is designed for audio and stage power applications. It offers 12 separate TL4 30A 120/240V (L14-30) connectors and 6 split 20A Edison Duplex (5-20) over a 200A 3 phases Main Breaker. Panel mount terminals and neon indicators allow quick and easy voltage checks. It also features a 1 to 3 phases selection located on top under an easy access trap door.

### Input

#### Connector

CAM In/Thru – Straight or Ground/Neutral Reversed

#### Breaker

200A 120/208V 3 phases Main Breaker

### Outputs

#### Connectors

12x L14-30 Receptacles  
6x 5-20 Duplex



<b>Features</b>	<b>Breakers</b>	12x 30A 120/240V Circuits 12x 20A 120V Circuits
	<b>Digital Metering</b>	Yes, integrated multifunction voltmeter/ammeter/wattmeter
	<b>Single/Three Phase Switch</b>	Yes, easy access from top of enclosure
	<b>Phase Presence Indicators</b>	1x neon light per input phase
	<b>Voltage Metering Jacks</b>	1x fused tip jack per input phase + 1x unfused tip jack on Neutral
	<b>Enclosure construction</b>	Robust steel housing
<b>Dimensions</b>	<b>Height</b>	400.05 mm (15.75?) – 9RU
	<b>Depth</b>	516.00 mm (20.32?)
	<b>Width</b>	482.60 mm (19.00?)



---

## Certifications

DESIGNED & MANUFACTURED  
IN CANADA 