


SolaSpot 1000

Technical Data Sheet

Features

Modular Construction	Pan - 540°
Fast Service Design	Tilt - 265°
Electronic Cooling System Control	Max Speed Pan- 360° (seconds)- 2.27
LED Type - 440W Bright White Engine	Max Speed Tilt- 180° (seconds)- 1.31
LED Hours- 70% Luminous output 50,000 hours	Full Color LCD Display W/ Battery Mode
Active Thermal Control	5-Pin DMX/RDM Connector
Fan Modes - Standard / Continuous / Studio	Ethernet In and Passive Thru
RDM Compatible	PowerCON TRUE1 Connector
Control Options - DMX 512 / RDM / Art-Net	Pan and Tilt Locks
DMX Channels - 39	Road Case Included (Single)

Optical

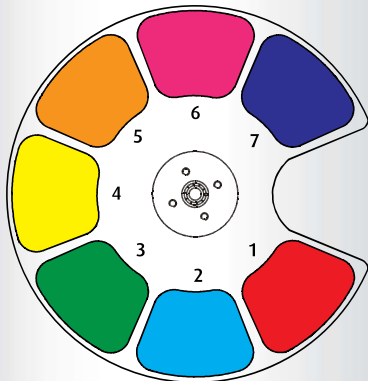


Fixed Color Wheel

- 1- Red
- 2- Blue
- 3- Green
- 4- Yellow
- 5- Orange
- 6- Purple
- 7- Dark Blue

- Linear CMY / CTO
- Lens Defog System
- Iris
- Zoom- 11 to 48 degrees
- Auto-Focus Function
- Rotating Animation
- Light Frost
- 4 Facet Linear Prism

Photometrics


Lumens -	18,000
CRI -	>70
Color Temperature-	7000K

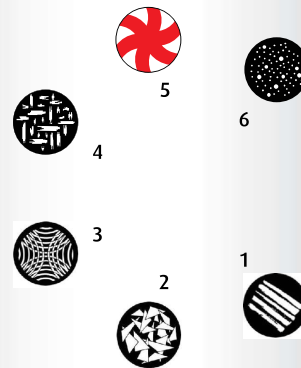

Rotating Gobo Wheel

6 + Open
Glass Lithos

- 1- Strikes
- 2- Triangles
- 3- Woven
- 4- Crosshatch
- 5- Technowedge
- 6- Shower

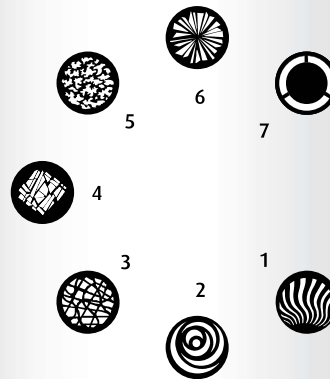

Fixed Gobo Wheel

7 + Open
Metal GOBO's

- 1- Seashells
- 2- Crescents
- 3- Abstract
- 4- Fracture
- 5- Verdure
- 6- Shatter
- 7- Tunnel

Gobo Dimensions

∅ { O.D.- 30mm (1.18 in)
Image Area- 25mm (.98 in)

Electrical

Input Power Rating- AC 100V - 240V 50/60 Hz


7-2.9 Amps

Auto Switching Power Supply

Db(A)- 38

Dimensions / Physical

Fixture Dimensions

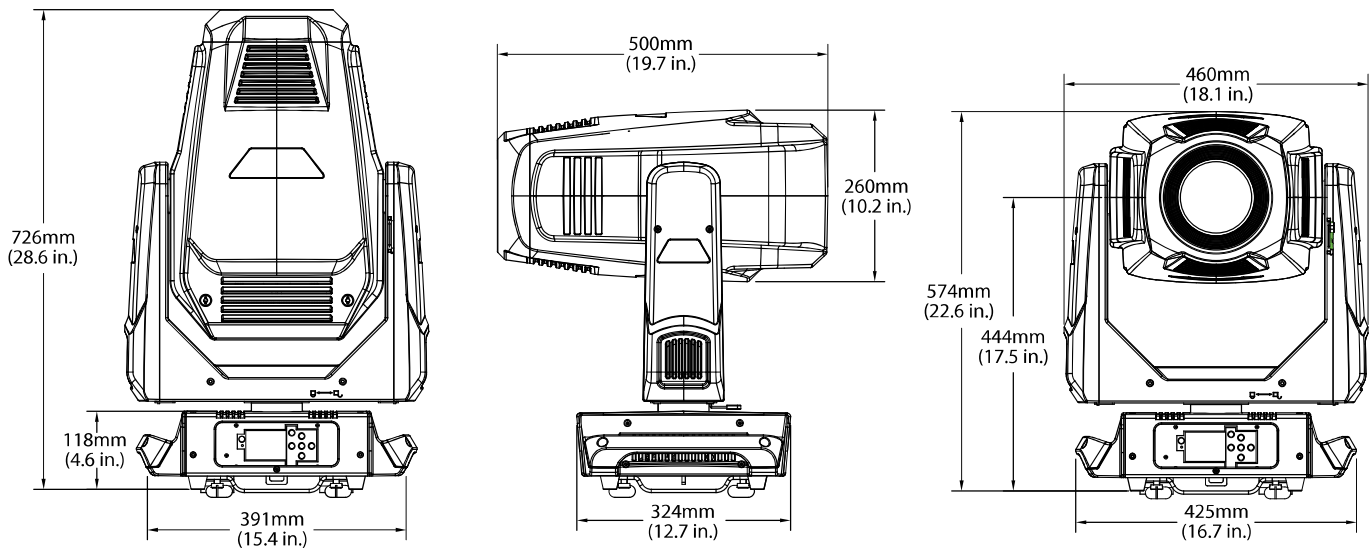

Fixture Weight	28.6 Kg (63 Lbs.)
Packing Gross / Shipping Weight	68 Kg (150 Lbs.)
Shipping Dimensions (L x W x H)	584 x 610 x 940 mm 23 x 24 x 37 in.
Min Distance to Flammable Objects	0.5m (1.64 ft.)
Min Distance to Lighted Objects	1.5m (4.9 ft.)
Operating Temperature	0 - 45° C (32 - 113° F)
Storage Temperature	-20 - 60° C (0 - 140° F)
Compliance Approvals	CE, ETL

Mounting Options-

The fixture can be truss mounted using included mounting brackets. It can also stand upright on a stable surface.

Available Fixture Colors -	Black - PN H7010028 White - By Request
----------------------------	---



Projection Chart

Zoom Range and Distance Chart

